





Dimension :  
Unit in mm

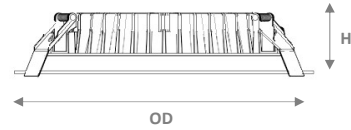


RECESSED TYPE



### PRODUCT SPECIFICATION

Model	Driver	Dimension (ØD x H)	Cut-out size	Beam Angle	CCT	CRI	Power	Lumen	Casing Colour
DL1-4-10W	LIFUD / PHILIPS / OSRAM / DONE	Ø 120 x 29 mm	Ø 100mm	100°	3000K / 4000K / 6000K	80 / 90	10W	900	White
DL1-4-12W		Ø 120 x 29 mm	Ø 100mm				12W	1080	
DL1-6-15W		Ø 170 x 29 mm	Ø 150mm				15W	1350	
DL1-6-20W		Ø 170 x 29 mm	Ø 150mm				20W	1800	
DL1-8-25W		Ø 225 x 29 mm	Ø 205mm				25W	1800	
DL1-8-30W		Ø 225 x 29 mm	Ø 205mm				30W	2550	
DL2-4-10W		120 x 120 x 29 mm	100x100mm				10W	900	
DL2-4-12W		120 x 120 x 29 mm	100x100mm				12W	1080	
DL2-6-15W		170 x 170 x 29 mm	150 x 150mm				15W	1350	
DL2-6-20W		170 x 170 x 29 mm	150 x 150mm				20W	1800	
DL2-8-25W		225 x 225 x 29 mm	205 x 205mm				20W	1800	
DL2-8-30W		225 x 225 x 29 mm	205 x 205mm				25W	2550	

### Photometric



### Features :

- \* High Power Factor > 0.9
- \* THD < 20
- \* Life Time >50000Hrs
- \* High Lumen Output
- \* Low Power Consumption
- \* Non Dimmable
- \* 1-10v Dimming
- \* Dali Dimming
- \* Safety Cert IEC/EN 61347
- \* Sirim approved

### Application:

- \* Corridor
- \* Shopping mall
- \* Residential

### Material :

- \* Die-Cast Aluminium
- \* Len