

# PIONI

Lighting Solutions . Systems

## DLGZ-1H / DLGZ-2H SPOT LIGHT




Dimension :  
Unit in mm



### PRODUCT SPECIFICATION

Model	Driver	Dimension (L x W x H)	Cut-out size	Beam Angle	CCT	CRI	Power	Lumen	Casing Colour
DLGZ-1H-20W	LiFUD / Osram / Philip	105 x 105 x 83 mm	95	15° / 60°	3000K / 4000K / 6000K	80 / 90	20W	1800	White / Black
DLGZ-2H-2X20W		210 x 105 x 83 mm	200 x 95				40W	3600	

### Photometric

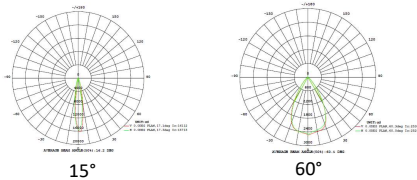

### Features :

- \* High Power Factor > 0.9
- \* THD < 20
- \* Life Time > 50000Hrs
- \* High Lumen Output
- \* Low Power Consumption
- \* Non Dimmable
- \* 1-10v Dimming
- \* Dali Dimming
- \* Safety Cert IEC/EN 61347
- \* Sirim approved

### Application:

- \* Corridor
- \* Shopping mall
- \* Residential

### Material :

- \* Die-Cast Aluminium
- \* Len

**LiFUD** PHILIPS OSRAM



\* We maintains a tolerance of ±10% on flux and power measurements