





Dimension :  
Unit in mm

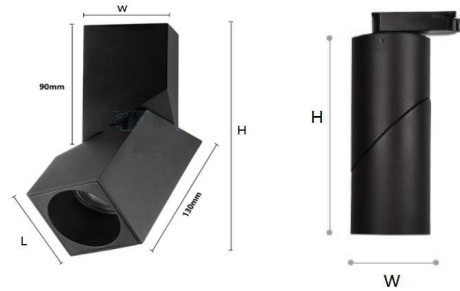

### PRODUCT SPECIFICATION

Model	Driver	Dimension (ØL x W x H)	Beam Angle	CCT	CRI	Power	Lumen	Casing Colour
SDL-MDLS-10W	LiFUD / Osram / DONE	Ø60 x 60 x 183 mm	15° / 24°	3000K / 4000K / 6000K	80 / 90	10W	900	White / Black
SDL-MDLS-12W		Ø60 x 60 x 183 mm				12W	1080	
SDL-MDLS-15W		Ø60 x 60 x 183 mm				15W	1350	
SRDL-MDLR-10W		Ø70 x 183 mm				10W	900	
SRDL-MDLR-12W		Ø70 x 183 mm				12W	1080	
SRDL-MDLR-15W		Ø70 x 183 mm				15W	1350	

#### Photometric

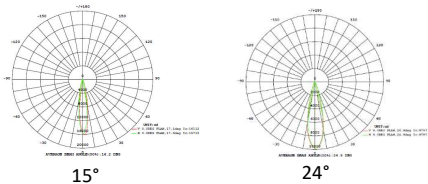

#### Features :

- \* High Power Factor > 0.9
- \* THD < 20
- \* Life Time >50000Hrs
- \* High Lumen Output
- \* Low Power Consumption
- \* Non Dimmable
- \* 1-10v Dimming
- \* Dali Dimming
- \* Safety Cert IEC/EN 61347
- \* Sirim approved

#### Application:

- \* Corridor
- \* Shopping mall
- \* Residential

#### Material :

- \* Die-Cast Aluminium
- \* Len

LIFUD OSRAM DOME  
东盈电源



220-240Vac



50K hours

*\* We maintains a tolerance of  $\pm 10\%$  on flux and power measurements*