




Dimension :
Unit in mm




RECESSED TYPE



PRODUCT SPECIFICATION

Model	Driver	Dimension (ØD x H)	Cut-out size	Beam Angle	CCT	CRI	Power	Lumen	Casing Colour
Q39-6-35W	LiFUD / Philips / Osram	Ø 195 x 230 mm	Ø 160mm	15° / 24° / 36° / 60°	Adjustable 3000K / 4000K / 6500K	> 85	35W	3150	White / Black

Photometric

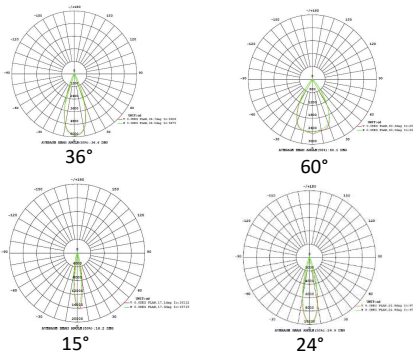

Features :

- * High Power Factor > 0.9
- * THD < 20
- * Life Time >50000Hrs
- * High Lumen Output
- * Low Power Consumption
- * Non Dimmable
- * 1-10v Dimming
- * Dali Dimming
- * Safety Cert IEC/EN 61347
- * Sirim approved

Application:

- * Office
- * Shopping mall
- * Commercial Building
- * School
- * Residentials
- * Hospital

Material :

- * Die-Cast Aluminium
- * Microprismatic Diffuser
- * PC Reflector