





Dimension :
Unit in mm

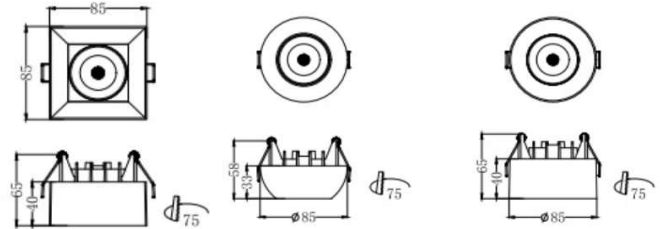

PRODUCT SPECIFICATION

Model	Driver	Dimension (ØD x H) & (L x W x H)	Cut-out size	Beam Angle	CCT	CRI	Power	Lumen	Casing Colour
NMW-R75	LiFUD / Osram / Philips	Ø85 x H65mm	Ø75mm	15° / 24° / 36°	3000K / 4000K / 6000K	80 / 90	12W	960	White RIM
NMW-O75		Ø85 x H58mm	Ø75mm						
NMW-S75		85 x 85 x H65mm	75 x 75mm						
NMW-R55		Ø65 x H53.8mm	Ø50mm				7w	560	
NMW-O55		Ø65 x H44.8mm	Ø50mm						
NMW-S55		65 x 65 x H53.8mm	50 x 50mm						

Photometric

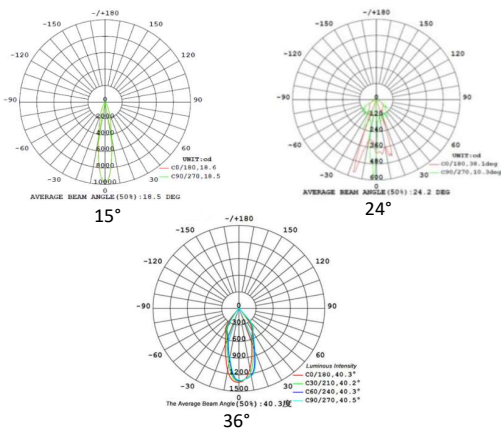

Features :

- * Life Time >50000Hrs
- * High Lumen Output
- * Low Power Consumption
- * Non Dimmable
- * 1-10v Dimming
- * Dali Dimming
- * Safety Cert IEC/EN 61347
- * Sirim approved

Application:

- * Cabinet
- * Residential

Material :

- * Aluminium
- * PC Len
- * PC Reflector